

KID'S RED SWEATER



Designed by Joanne Yordanou

Instructions are written for size 3. Any changes for 6, 9 and 12 are written in brackets. If there is only one figure it applies to all sizes. Standard abbreviations are used. Recommended for knitters with experience.

SIZES:

Chest measurement:

3 yrs 23 ins [58.5 cm]

6 yrs 26 " [66 "]

9 yrs 29 " [73.5 "]

12 yrs 32 " [81.5 "]

Finished Chest:

3 yrs 27.5 ins [70 cm]

9 yrs 36.5 " [92.5 "]

6 yrs 32 " [81.5 "]

12 yrs 41 " [104 "]

You need:

Briggs & Little Regal (100g) pure new wool 4 (5,5,6) hanks (Red).

Size 4.5 mm (U.S. 7) knitting needles or size needed to obtain tension. 2 st holders. One cable needle.

Tension:

20 sts and 26 rows = 10 cm (4 ins) in stocking st. Work to exact tension with specified yarn to obtain satisfactory results. TO SAVE TIME, TAKE TIME TO CHECK TENSION.

Stitches used:

C4F = slip next 2 sts onto a cable needle and leave at front of work. K2, then K2 from cable needle.

C4B = slip next 2 sts onto a cable needle and leave at back of work. K2, then K2 from cable needle.


T3F = slip next 2 sts onto a cable needle and leave at front of work. P1, then K2 from cable needle.

T3B = slip next st onto a cable needle and leave at back of work. K2, then P1 from cable needle.

T4F = slip next 2 sts onto a cable needle and leave at front of work. P2, then K2 from cable needle.


T4B= slip next 2 sts onto a cable needle and leave at back of work. K2, then P2 from cable needle.

Sl Wrap K= yarn forward, slip next st onto right-hand needle, yarn back, return slipped st to left-hand needle. Turn. Leave slipped st on what is now the right-hand needle.

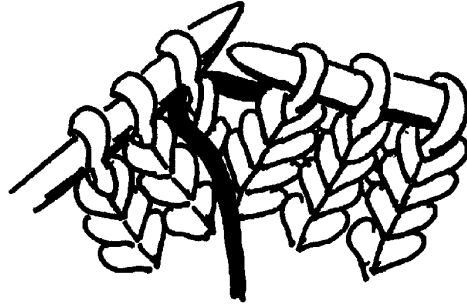

Knit Wrap

Sl Wrap P= yarn back, slip next st onto right-hand needle, yarn forward, return slipped st to left-hand needle. Turn. Leave slipped st on what is now the right-hand needle.

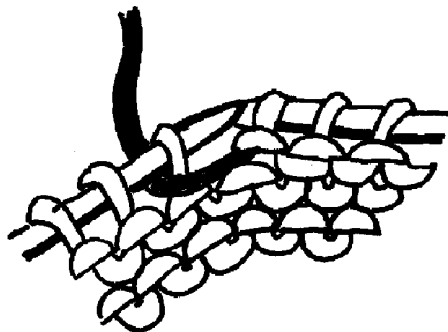

Purl Wrap

Cable Pattern:

Row 1: (right side): P2. K4. *P4. K4. Rep from * to last 2 sts, P2.

Row 2: K2. P4. *K4. P4. Rep from * to last 2 sts, K2.

Row 3: P2. C4F. P4. C4B. *P4. C4F. P4. C4B. Rep from * to last 2 sts, P2.

Row 4: As Row 2.

Rows 5-8: As Row 1-4.

Row 9: P1. T3B. T4F. T4B. T3F. *P2. T3B. T4F. T4B. T3F. Rep from * to last st, P1.

Row 10: K1. P2. K3. P4. K3. P2. *K2. P2. K3. P4. K3. P2. Rep from * to last st, K1.

Row 11: P1. K2. P3. C4B. P3. K2. *P2. K2. P3. C4B. P3. K2. Rep from * to last st, P1.

Row 12: As Row 10.

Row 13: P1. T3F. T4B. T4F. T3B. *P2. T3F. T4B. T4F. T3B. Rep from * to last st, P1.

Row 14: As Row 2.

Row 15: P2. C4B. P4. C4F. *P4. C4B. P4. C4F. Rep from * to last 2 sts, P2.

Row 16: As Row 2.

Row 17: As Row 1.

Rows 18-24: Rep last 4 rows then Rows 14, 15 and 16 again.

Row 25: P1. T3B. T3F. P2. T3B. *T4F. T4B. T3F. P2. T3B. Rep from * to last 4 sts, T3F. P1.

Row 26: K1. P2. [K2. P2] twice. *K3. P4. K3. P2. K2. P2. Rep from * to last 5 sts, K2. P2. K1.

Row 27: P1. K2. [P2. K2] twice. *P3. C4F. P3. K2. P2. K2. Rep from * to last 5 sts, P2. K2. P1.

Row 28: As Row 26.

Row 29: P1. T3F. T3B. P2. T3F. *T4B. T4F. T3B. P2. T3F. Rep from * to last 4 sts, T3B. P1.

Rows 30-32: As Rows 2-4.

These 32 rows form Cable Pat.



To Make:

BACK

Cast on 96(112,128,144) sts.

Beg and cont in Cable pat until work from beg measures 39.5(43,54.5,57) cm [15.5(17,21.5,22.5) ins], ending with RS facing for next row.

Shoulder shaping: Cast off 8(11,14,16) sts beg next 4 rows, then 9(11,13,17) sts beg following 2 rows. Cast off 46 sts.

FRONT

Cast on 96(112,128,144) sts.

Cont in pat until work from beg measures 34.5(36,47.5,50) cm [13.5(14.25,18.75,19.75) ins] ending with RS facing for next row.

Neck shaping: Next row: Pat across 40(48,56,64) sts (neck edge). Turn. Leave rem sts on a spare needle.

Dec 1 st at neck edge on next 15 rows. Cont in pat until work from beg measures 39.5(43,47.5,51) cm [15.5(17,18.75,20) ins], ending with RS facing for next row.

Shoulder shaping: Cast off 8(11,14,16) sts beg next and following alt row. Work 1 row even. Cast off rem 9(11,13,17) sts.

Slip 16 sts from spare needle onto a st holder. Dec 1 st at neck edge on next 15 rows.

Cont in pat until work from beg 39.5(43,47.5,51) cm [15.5(17,18.75,20) ins], ending with WS facing for next row.

Shoulder shaping: Cast off 8(11,14,16) sts beg next and following alt row. Work 1 row even. Cast off rem 9(11,13,17) sts.

SLEEVES

Cast on 48(48,64,64) sts.

Proceed as follows:

Beg Cable pat and inc 1 st each end of needle on 3rd and following alt rows to 86(94,90,94) sts, then every following 4th row to 98(108,118,126) sts taking inc sts into pat.

Cont in pat until work from beg measures 26.5(30.5,34.5,38) cm [10.5(12,13.5,15) ins], ending with RS facing for next row.

Cast off.

FINISHING

Collar

Cast on 122(126,134,134) sts. Proceed in (K2. P2) ribbing as follows:

Row 1: *K2. P2. Rep from * to end of row.

Row 2: Rib to last 2 sts, work Sl Wrap K or Sl Wrap P on next st (depending if the next st is a knit or purl st) and slip the wrapped st back to left hand needle. Turn.

Next: Rep last row (leaving 2 more sts unworked on every row) until 32(32,36,36) sts are unworked on each end. Turn.

Next 2 rows: Rib across row, working K wrap tog or P wrap tog (see diagram and stitch glossary) around wrapped sts. Cast off in ribbing.

Sew shoulder seams. Place markers 18(19.5,21.5,23) cm [7(7.75,8.5,9) ins] down from shoulders. Sew in sleeves between markers. Sew side and sleeve seams. Sew cast on edge of collar to neckline, leaving a 7.5 cm [3 ins] overlap at front.

Sew in sleeves. Sew side and sleeve seams.

Care for your sweater:

Your sweater is made from 100% pure Canadian wool. Very warm and durable and less processed than most yarns. It should be handwashed in lukewarm water and laid flat to dry.

©Copyright Joanne Yordanou 2006

www.joanneyardanou.com